


# Satin Slippers


by Cynthia Coulter



**Fabric A**  
 42293-312 or -616  
 BQ: 1 Panel (2/3 yard)  
 SB: 1/2 Panel (1/3 yard)

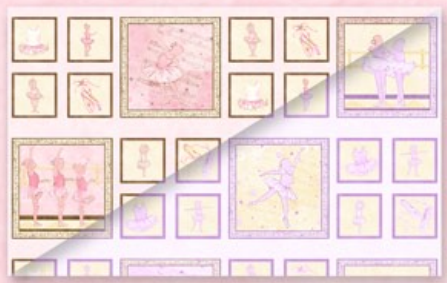

**Fabric B**  
 42294-312 or -616  
 BQ: 2 yards

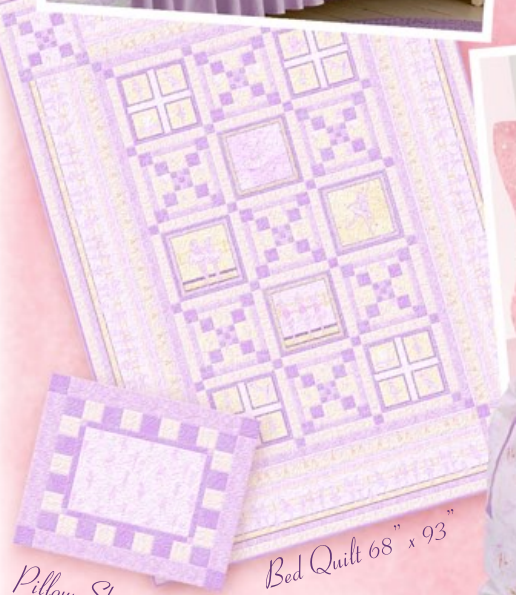

**Fabric C**  
 42295-321 or -661  
 PS: 1/2 yard

Free Pattern  
 offered in independent  
 quilt shops to complement  
 this fabric collection.



Shoe Bag 9.5" x 12"



**Fabric D**  
 42296-132  
 or 42297-161  
 BQ: 1/2 yard

**Fabric E**  
 42297-331  
 or 42296-662  
 BQ: 1/3 yard  
 SB: 1/2 yard



**Fabric F**  
 42298-222 or  
 Q1817-39065-666  
 BQ: 1 1/8 yards



**Fabric G**  
 42298-333 or -666  
 BQ: 1 1/2 yards  
 PS: 2/3 yard



**Fabric H**  
 42299-233 or  
 Q1817-39065-666  
 BQ: 1 1/4 yards  
 (includes binding)  
 PS: 1 1/2 yards  
 (includes backing)



**Fabric I**  
 42299-333 or -666  
 BQ: 5 3/4 yards  
 (backing only)



**Fabric J**  
 42300-133 or -166  
 BQ: 1 1/2 yards  
 PS: 1/3 yard



# Satin Slippers

Please read all instructions carefully before starting. All instructions include a 1/4" seam allowance and strips are cut from selvage to selvage unless otherwise stated.

## Bed Quilt Instructions

approximate size 68" x 93"

### 1. Cut the following:

**Fabric A** - \*\*cut 8 - 10 1/2" x 10 1/2" squares (center designs evenly)

**Fabric B** - cut borders lengthwise: cut 2 - 10 1/2" x 42 1/2" and 2 - 10 1/2" x 67 1/2"

**Fabric D** - cut 3 - 3 1/2" strips, subcut 28 - 3 1/2" squares

**Fabric E** - cut 2 - 3 1/2" strips, subcut 16 - 3 1/2" squares

**Fabric F** - cut 7 - 1 1/2" strips, use 2 strips and subcut 44 - 1 1/2" squares

cut 5 - 2 1/2" strips

cut 2 - 2" strips, subcut 28 - 2" squares (cornerstones and corners)

**Fabric G** - cut 2 - 7 1/2" strips

**BORDERS**: cut 6 - 1 1/2" strips, sew end to end for 1 long strip, then subcut 2 - 1 1/2" x 42 1/2" and

2 - 1 1/2" x 67 1/2"

cut 6 - 2" strips, sew end to end then subcut

2 - 2" x 39 1/2" and 2 - 2" x 64 1/2"

**Fabric H** - \*\*cut 11 - 1" strips, subcut 16 - 1" x 10 1/2" and 16 - 1" x 11 1/2"

**BINDING** - cut 9 - 2 1/4" strips, sew end to end and press in half


**Fabric J** - cut 6 - 1 1/2" strips (use 3 strips and subcut 44 - 1 1/2" x 2 1/2")

cut 13 - 2" strips, subcut 38 - 2" x 11 1/2" (sashing)

**Borders** - cut 8 - 2" strips, sew end to end then subcut 2 - 2" x 89 1/2" and 2 - 2" x 67 1/2"

### 2. Piecing Order:



1. Sew **H** 1" borders around 8 **A** blocks, sides first, then top and bottom borders. \*\* (If **A** measurements are slightly different, cut **H** borders slightly larger, sew around **A** blocks, then trim all **A** blocks to measure 11 1/2" x 11 1/2".)




2. Make 11 - 3" finished (3 1/2" unf.) center 9-patches.

First, sew **F**, **G**, **F** 1 1/2" strips side by side. Press toward **F**. Subcut 22 - 1 1/2" segments for the top and bottom rows.


Next, sew **G**, **F**, **G** 1 1/2" strips side by side. Press toward **F**. Subcut 11 - 1 1/2" segments for the middle row.




Then, sew rows together for 11 9-patches.




3. Make 44 - 3" finished (3 1/2" unf.) corner units. First, make 3 strip sets by sewing **J** 1 1/2" and **F** 2 1/2" strips side by side. Press toward **F**. Subcut 44 - 2 1/2" segments.

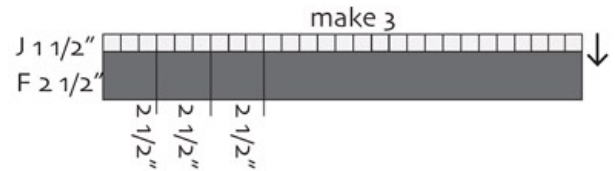


Next, sew individual **F** 1 1/2" squares and **J** 1 1/2" x 2 1/2" rectangles together, make 44 pairs. Press toward **F**.




Sew segments together for 44 corner units:

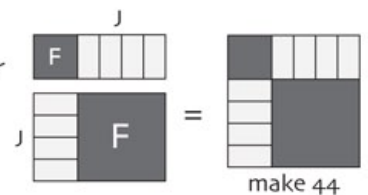



4. Sew **F** 1 1/2", **G** 7 1/2", **F** 1 1/2" strips side by side. Press toward **G**. Subcut 22 - 1 1/2" side segments.




Sew **F** 2 1/2", **G** 7 1/2", **F** 2 1/2" strips side by side. Press toward **G**. Subcut 22 - 1 1/2" top and bottom segments.




5. Make 11 blocks, 7 with **D**  $3\frac{1}{2}$ " squares and make 4 corner blocks with **E**  $3\frac{1}{2}$ " squares by sewing rows of units according to the diagrams. Next, sew segments from step 4 to the SIDES first, then TOP and BOTTOM. Blocks measure 11" finished (11 1/2" unf.).

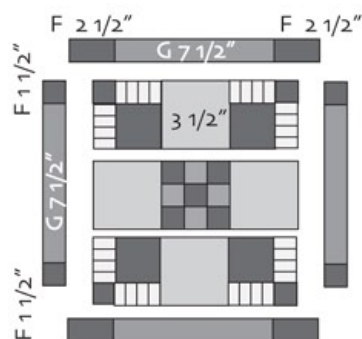

make 7




make 4



make 6

6. Sashing and cornerstones: sew six rows alternating four **F** 2" squares and three **J** 2" x 11 1/2"

$J$  2" x 67 1/2"

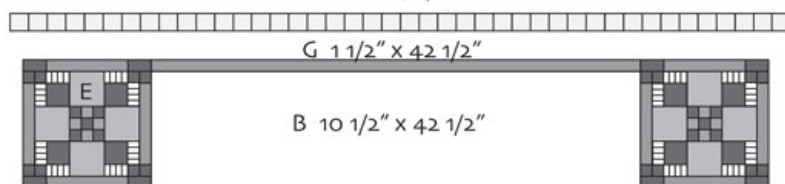


7. Sew rows of blocks alternating with  $J$  2" x 11 1/2" sashing according to the diagram. Then sew rows together with sashing rows from step 6.

8. Sew  $G$  2" x 64 1/2" to the SIDES of the quilt. Sew  $F$  2" squares to both ends of two  $G$  2" x 39 1/2", then sew to the TOP and BOTTOM of the quilt.

9. Next, sew  $G$  1 1/2" strips to one side of all **B** borders. Next, sew  $G/B$  to the quilt SIDES. Sew a corner pieced block to both ends of the other two  $G/B$ , then sew to the quilt TOP and BOTTOM.

10. Last, sew  $J$  2" borders around the quilt, SIDES first, then TOP and BOTTOM borders according to the diagram.

11. The quilt measures approximately 68" x 93". Make backing (**Fabric I**) at least 6" larger than the top. Layer and baste together top, batting and backing. Quilt as desired. Attach binding (**Fabric H**) and enjoy!!

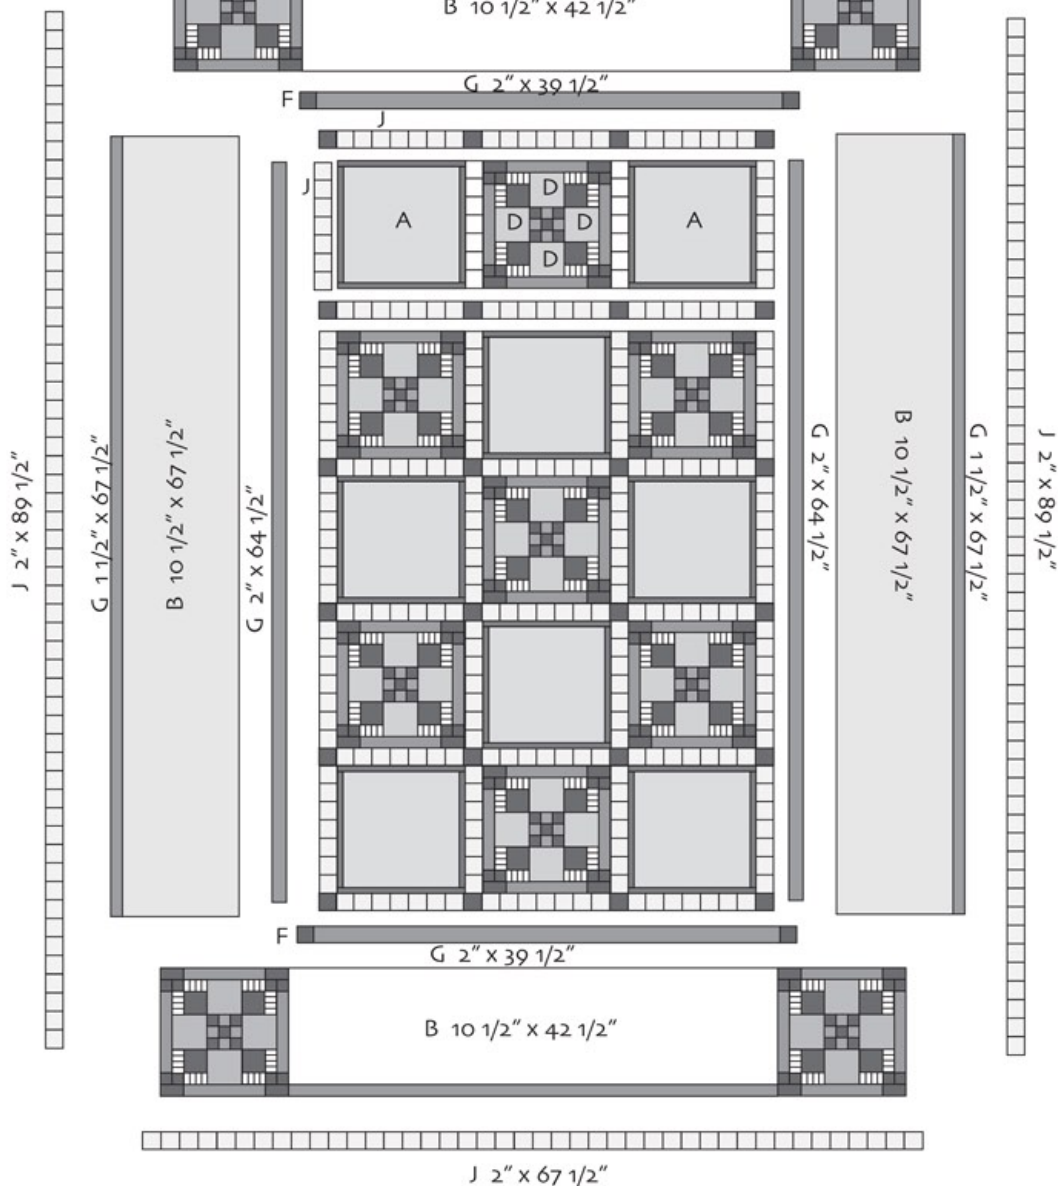

# Pillow Sham Instructions

approximate size 33" x 27"

## 1. Cut the following:

**Fabric C** - cut 1 - 13 1/2" x 19 1/2"

**Fabric G** - cut 4 - 3 1/2" strips, subcut 2 - 3 1/2" x 21 1/2" and 2 - 3 1/2" x 27 1/2"  
cut 4 - 1 1/2" x 1 1/2" squares




**Fabric H** - cut 2 - 3 1/2" strips, subcut 18 - 3 1/2" squares  
cut 2 - 1 1/2" strips, subcut 2 - 1 1/2" x 13 1/2" and  
2 - 1 1/2" x 19 1/2"

**BACKING** - cut 2 - 17" x 33 1/2"

**Fabric J** - cut 2 - 3 1/2" strips, subcut 14 - 3 1/2" squares

## 2. Piecing Order:

- Sew **H** 1 1/2" x 13 1/2" borders to both SIDES of **C**. Next, sew **G** 1 1/2" squares to both ends of two **H** 1 1/2" x 19 1/2", then sew to the TOP and BOTTOM of **C** according to the diagram.
- Sew two rows each alternating three **J** 3 1/2" squares and two **H** 3 1/2" squares, then sew to the SIDES of the sham center block. Next, sew two rows each alternating four **J** 3 1/2" squares and five **H** 3 1/2" squares, then sew to the TOP and BOTTOM of center block.
- Sew **G** 3 1/2" x 21 1/2" to the sham SIDES. Next, sew **H** 3 1/2" squares to both ends of two **G** 3 1/2" x 27 1/2", then sew to the TOP and BOTTOM of sham.
- Double fold edge 1/4" along one long side of both backing pieces (**H**). Press, then topstitch both backing pieces close to folded edge.
- Place both backing pieces over pillow sham, right sides together. Match raw edges to create backing overlap, pin in place. Stitch 1/4" around pillow sham edge. Clip corners, then turn sham right sides out. Stitch in the ditch (seam between **G** border and **J/H** squares) to create flange. Insert pillow and enjoy!!

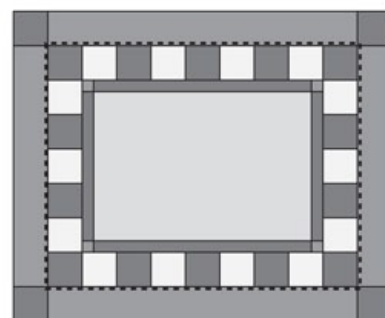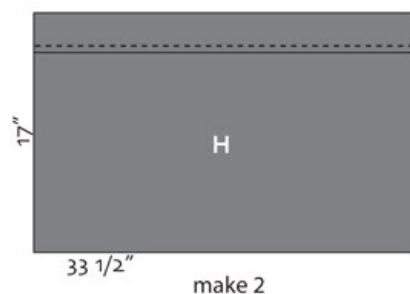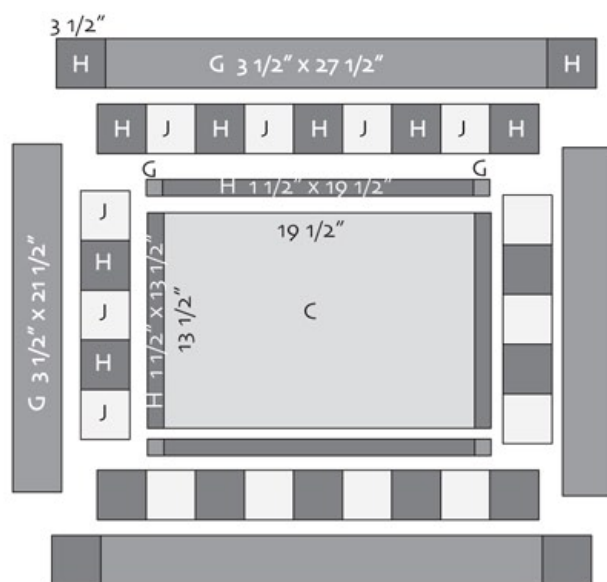

# Shoe Bag Instructions

(2) approximately 9 1/2" x 12" each

- Cut the following: **Fabric E** - cut 2 - 20" x 15" pieces.
- Press double sided fusible web to the backside of **Fabric A**, enough to cover two 4 1/2" x 4 1/2" squares. Follow manufactures directions.
- Cut two **A** 4 1/2" squares that have been fused. Fold **Fabric E** in half, then position one **A** square evenly over right side of one half of **E** and press in place to secure. Optional decorative stitches over edge of squares may be done at this time. Repeat for second bag.
- Fold top edge of **E** 1/4" to the backside and press, then fold another 1 1/2" under. Press. Stitch along folded edge to create drawstring casing. Next, fold bag in half, right sides together. Begin stitching 1" from top side, stitch along one side and bottom. Turn bag right sides out. Insert 28" long ribbon or shoe lace into casing. Pull ribbon to gather. Fill with dance shoes, tie ribbon and enjoy!!

