

Pintucks:


Cut a piece of fabric larger than your desired finished size.

Set up your machine with a 2.5/80 twin needle, a 5 groove pintuck foot, and a bobbin that matches your fabric. Thread your machine with two spools of thread that match your fabric.



Draw a diagonal line across the fabric with a long ruler and a disappearing marking pen or chalk (draw the line from corner to corner as shown). Now with a 2.0 mm straight stitch, sew down the marked diagonal line.

For the next row, attach a quilting bar $\frac{3}{4}$ " away from the middle of the twin needle and place the bar directly over the first row of stitching and stitch down the fabric as shown (the quilting bar comes with most sewing machines). Continue sewing the lines across the entire fabric (you will need to flip the fabric around to quilt the other side).

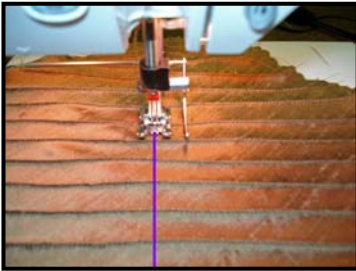

Remove your fabric from the machine and turn your fabric around so that you can draw another diagonal line down the fabric going in the opposite direction. Sew in that direction in the same manner until your fabric is completely quilted. Your quilted fabric is now ready to be cut down to the desired size.